

# HAMER BRAND MODEL 3560

## Automated Bagging System

- Fully Integrated, High Speed, High Volume Bag Handling
- Small Footprint Up to 14 Bags Per Minute

When integrated with an electronic net weigh scale, the Model 3560 automatically picks and positions the empty bag on the filler spout, fills the bag with weighed product, and immediately directs the filled bag to the bag closing station.

The Model 3560 is capable of handling flat or gusseted, multi-wall open mouth paper, plastic, poly, and laminated woven polypropylene bags, as well as all forms of pinch bags.




Shown with Corrosion Resistant Package, Fischbein Brand PBC 6000 and Optional Conveyors.

## **APPLICATIONS**

- Agricultural Seed
- Animal Feed & Feed Additives
- Cat Litter

- Chemicals
- Fertilizers
- Minerals

- Pet Food
- Plastic Resins
- And more...

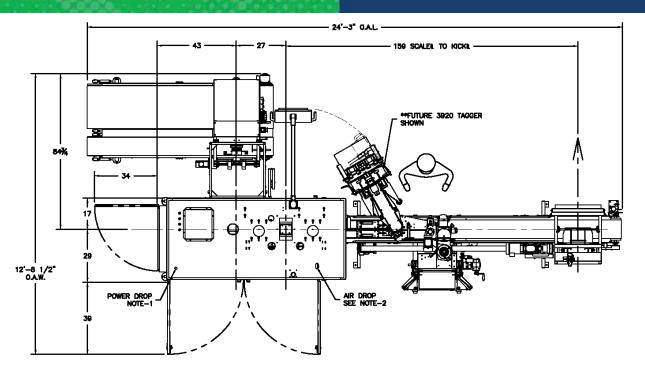

#### **FEATURES**

#### **Bag Types**

 Processes a variety of flat or gusseted bags, including multi-wall paper, laminated woven polypropylene, and pinch bags.

#### **Fast Product Changeover**

 Product change-over is fast, easy, and safe thanks to advanced touch screen controls and motorized adjustments.

## **Auto Bag Correction**

 Auto bag index correction ensures the bag is centered under the spout prior to filling.

## No Bag - No Dump Feature

• The "no bag-no dump" feature prevents the machine from releasing product unless the bag is centered correctly, making for minimal product spills.

## **OPTIONS**

- Integrated sealing conveyor
- · Enhanced dust controls
- Extended bag feed conveyor
- Tagger infeed assembly
- Special anti-corrosion package
- 575 VAC
- Automated tilt tray adjustments
- Data collection and reporting
- Network router

#### **SPECIFICATIONS**

#### **Dimensions:**

• L 66 in (167.4 cm), D 33 in (83.82 cm), H 72 in (182.88 cm)

#### Speed

• Up to 14 bags per minute, product and bag size dependent

## Electric (NEMA 12):

• 230/380/460 VAC, 3 PH, 60 Hz

#### Air:

• 30 cfm @ 100 PSI

## **BAGS**

## **Bag Types:**

• Multi-wall paper, Woven polypropylene bags and PE.

## Bag Thickness:

• Maximum 12 mils

## Bag Sizes Min:

• 12"W x 18"L (30.5 cm x 45.7 cm)

## Free Bag Top:

• Minimum 6 in (15.2 cm) Max: 20"W x 40"L (50.8 cm x 101.6 cm)





